

Theia TECHNOLOGIES




The Theia Technologies 1.67mm CS-mount lens achieves 110° horizontal angle of view on a 1/3" sensor using patented Linear Optical Technology® to achieve an ultra-wide field of view with ULTRA LOW DISTORTION (<1% barrel).

The superior quality of this lens will support sensor technology up to 3 megapixels resolution. It combines stunning performance with the highest build quality. This lens is also available in manual iris CS-mount SY110-M and C-mount MY110-M.

We think that it is perfect for use with our miniature High Definition camera systems including:

- SeeSense SS-W-HD1080P 1/3" 1-CMOS camera

SY110A envelope Theia Technologies proprietary

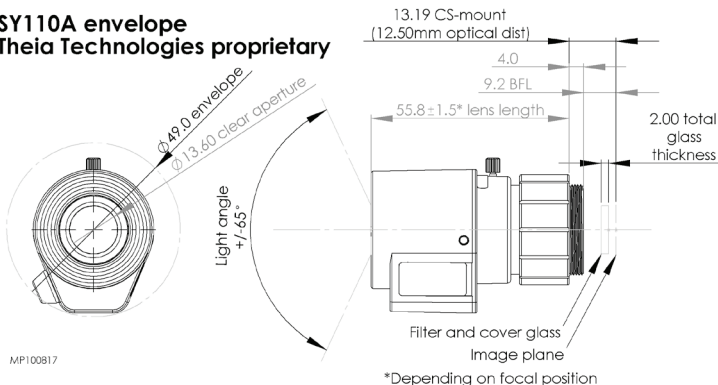

Please contact SeeSense for further details of C and CS-mount lenses we offer:

www.seesense.eu nigel@seesense.eu

Features:

- Full High Definition 3MP 1.67mm lens
- **ULTRA LOW DISTORTION**
- Integrates with 1/3" 1-CCD / CMOS HD cameras
- DC Auto iris and manual focus
- Back focus adjustment feature
- Robust, precise mechanics
- Weight 51 grammes
- **N.B. Uses Linear Optical Technology®**
Please note that the image will be inverted (mount camera upside down or invert image electronically)

Applications:

- Security
- Broadcast
- Machine Vision / Factory Automation

Specification:

Focal Length	1.67mm
Image Format	1/3" (also 1/2.5" with slight vignetting)
Image Size	Ø 6.0mm (5.23mm x 2.94mm)
Maximum Aperture	F1.8
Aperture Range	F1.8 - Close (no detente)
Angle of View (HxV)	110° x 94° (1/3" sensor)
Focussing Range	∞ - 0.5m (0.1m by adjusting back focus)
Back Focus	Adjustable
Minimum Object Distance	0.1m (by adjusting back focus)
Pan Focus Distance	0.5m - ∞
Modular Transfer Function	MTF of 140 lp/mm @ >20%
Resolution	Up to 3 megapixel
Distortion	<1% barrel at image edge (for 1/3" sensor)
I/R Correction	"Day/Night"
Flange Focal Length	12.5mm (in air)
Locking Screws	On iris
Mount	CS-mount (metal)
Weight (g)	51 grammes
Dimensions	35mm (Diameter) x 56mm (Length)
Temperature	Operating -20°C to +50°C Storage -20°C to +60°C

Sensor Size	1/4"	1/3"	1/2.5"*
Field of View (horizontal)	94°	110°	120°
Field of View (vertical)	78°	94°	104°
Field of View (diagonal)	107°	122°	130°
* Risk of slight vignetting			

Rev: 1.023.0114 E.&O.E.