


## SWIVELINK STANDARD MOUNTING SOLUTION



The SWIVELINK STANDARD MOUNTING SOLUTION can hold a payload of 13KG in any position utilising a 300mm link. The system is well designed and very stable. These solutions are perfect for a wide range of applications including machine vision, FA, General Industry, Film and Broadcast.

PART NUMBER	DESCRIPTION	NOTES
SLM-1	<b>Standard Ball Base</b>	
SLM-5XS	<b>Ball to 1/4-20 male tripod mount</b>	Attaches to SLM-2-2XS
SLM-5XSF	<b>Ball to 1/4-20 female tripod mount</b>	<b>SeeSense Special</b>
SLM-4	<b>Button Mount</b>	Threaded M30 x 1.5
SLM-2	<b>Standard Knuckle</b>	
SLM-290	<b>Standard Tee Knuckle</b>	
SLM-2-2XS	<b>Mount Coupler Knuckle</b>	Small - Standard adapter
SLM-3-50	<b>Standard 50mm Link</b>	
SLM-3-100	<b>Standard 100mm Link</b>	
SLM-3-150	<b>Standard 150mm Link</b>	
SLM-3-200	<b>Standard 200mm Link</b>	
SLM-3-300	<b>Standard 300mm Link</b>	
SLM-3XST	<b>Standard Tee Link</b>	
SLM-3	<b>Pipe extended Ball to 3/8-19 BSPT</b>	Attach to SLM-2 / 290
SLM-6	<b>Custom Mounting Plate</b>	Attaches to SLM-1
SLM-CB	<b>Clamp On Base</b>	Attach to SLM-1XS
SLM-CH	<b>Metric Quick Clamp Handle</b>	
SLM-4MMT	<b>4mm T-handle Wrench</b>	

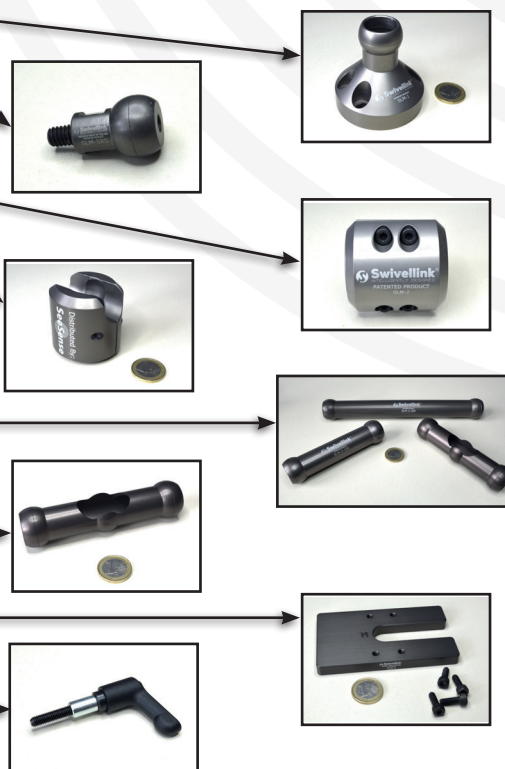

## Create Your Swivellink Mount System



### BASE + KNUCKLE + LINK + MOUNT

\* Magnetic base and modified ball - 1/4 tripod mount is a SeeSense special

Please contact SeeSense for further details of our unique camera mounting solutions.

[www.seesense.eu](http://www.seesense.eu) [sales@seesense.eu](mailto:sales@seesense.eu)

IMPERIAL VERSIONS ALSO AVAILABLE  
INCLUDING HEAVY DUTY BALL  
BASE, KNUCKLE AND LINKS

Rev: 1.019.0320 E.&O.E.